

NOTES 2012 IRC

GRADE CONDITIONS MAY VARY FOR INDIVIDUAL SITE FROM THAT SHOWN  
 BUILDER SHALL VERIFY AND COORDINATE PER ACTUAL SITE CONDITIONS

WINDOW HEAD HEIGHTS  
 1ST FLOOR 9'-0" UNO ON ELEVATIONS  
 2ND FLOOR 8'-0" UNO ON ELEVATIONS

ROOFING PITCHED SHINGLES PER DEVELOPER

WINDOWS MANUFACTURER PER DEVELOPER DIVIDED LITES AS SHOWN ON THE EXTERIOR ELEVATIONS

ENTRY DOOR AS SELECTED BY DEVELOPER

GARAGE DOORS AS SELECTED BY DEVELOPER, RAISED PANEL AS SHOWN

CHIMNEY AS OCCURS TOP OF CHIMNEYS TO BE A MINIMUM OF 24" ABOVE ANY ROOF WITHIN 10' OF CHIMNEY

ALL EXTERIOR MATERIALS TO BE INSTALLED PER MANUFACTURER'S WRITTEN INSTRUCTIONS

PROTECTION AGAINST DECAY  
 (ALL PORTIONS OF A PORCH SCREEN PORCH OR DECK FROM THE BOTTOM OF THE HEADER DOWN, INCLUDING POST RAILS PICKETS STEPS AND FLOOR STRUCTURE)

KEY NOTES

- |  |  |
|--|--|
| <p><b>MASONRY</b></p> <ul style="list-style-type: none"> <li>[1] ADHERED STONE VENEER AS SELECTED BY DEVELOPER HEIGHT AS NOTED</li> <li>[2] MASONRY FULL BRICK AS SELECTED BY DEVELOPER HEIGHT AS NOTED</li> <li>[3] MASONRY FULL STONE AS SELECTED BY DEVELOPER HEIGHT AS NOTED</li> <li>[4] 8" SOLDIER COURSE</li> <li>[5] RAINLOCK COURSE</li> <li>[6] DECORATIVE KEY SEE DETAIL</li> </ul> <p><b>TYPICALS</b></p> <ul style="list-style-type: none"> <li>[7] CORROSION RESISTANT SCREEN LOUVERED VENTS SIZE AS NOTED</li> <li>[8] CODE APPROVED TERMINATION CHIMNEY CAP</li> <li>[9] CORROSION RESISTANT ROOF TO WALL FLASHING CODE COMPLIANT FLASHING MUST BE INSTALLED AT ALL ROOF/WALL INTERSECTIONS</li> </ul> <ul style="list-style-type: none"> <li>[10] STANDING SEAM METAL ROOF INSTALL PER MANUFACTURER'S WRITTEN INSTRUCTIONS</li> <li>[11] DECORATIVE WROUGHT IRON SEE DETAILS</li> </ul> | <p><b>SIDING</b></p> <ul style="list-style-type: none"> <li>[12] FIBER CEMENT SHAKE SIDING PER DEVELOPER</li> <li>[13] 5/4x4 CORNER TRIM BOARDS</li> <li>[14] FIBER CEMENT LAP SIDING PER DEVELOPER</li> <li>[15] 5/4x4 CORNER TRIM BOARDS</li> <li>[16] FIBER CEMENT NAVY SIDING PER DEVELOPER</li> <li>[17] 5/4x4 CORNER TRIM BOARDS</li> <li>[18] FIBER CEMENT PANEL SIDING W/ 1X3 BATTIS AT 12" O.C (VINYL BOARD AND BATT SIDING)</li> <li>[19] 1X FIBER CEMENT TRIM OR EQUAL UNO SIZE AS NOTED</li> <li>[20] FALSE MOOD SHUTTERS TYPE AS SHOWN SIZE AS NOTED</li> </ul> |
|--|--|



ATLANTA, GEORGIA LOCATION  
 1845 SATELLITE BLVD  
 SUITE 250  
 DULUTH, GA 30091  
 PHONE: 770-375-1351

THESE PLANS AND SPECIFICATIONS ARE PROTECTED UNDER FEDERAL COPYRIGHT LAWS. © GMD DESIGN GROUP OF GEORGIA, INC. MAINTAINS OWNERSHIP OF SUCH AND ALL RIGHTS AND PRIVILEGES

NO.	DATE	REVISION
1	01/01/16	RESUBMITAL

PROFESSIONAL SEAL

PROJECT TITLE

CLIENTS NAME




PROJECT NO GMDGAI6041

SHEET TITLE  
**WILLIAMSON  
 EXTERIOR  
 ELEVATIONS**

PRINT DATE  
 JUNE 07, 2016

SHEET NO  
**A1.5**

ISSUED FOR/PERMIT CONSTRUCTION

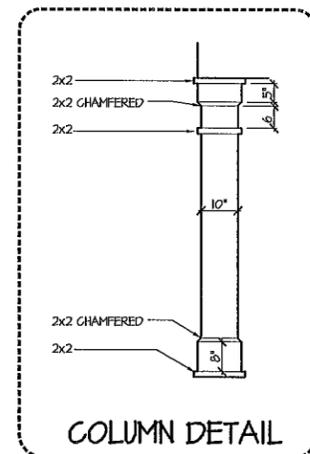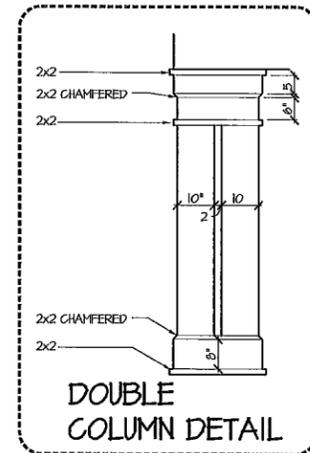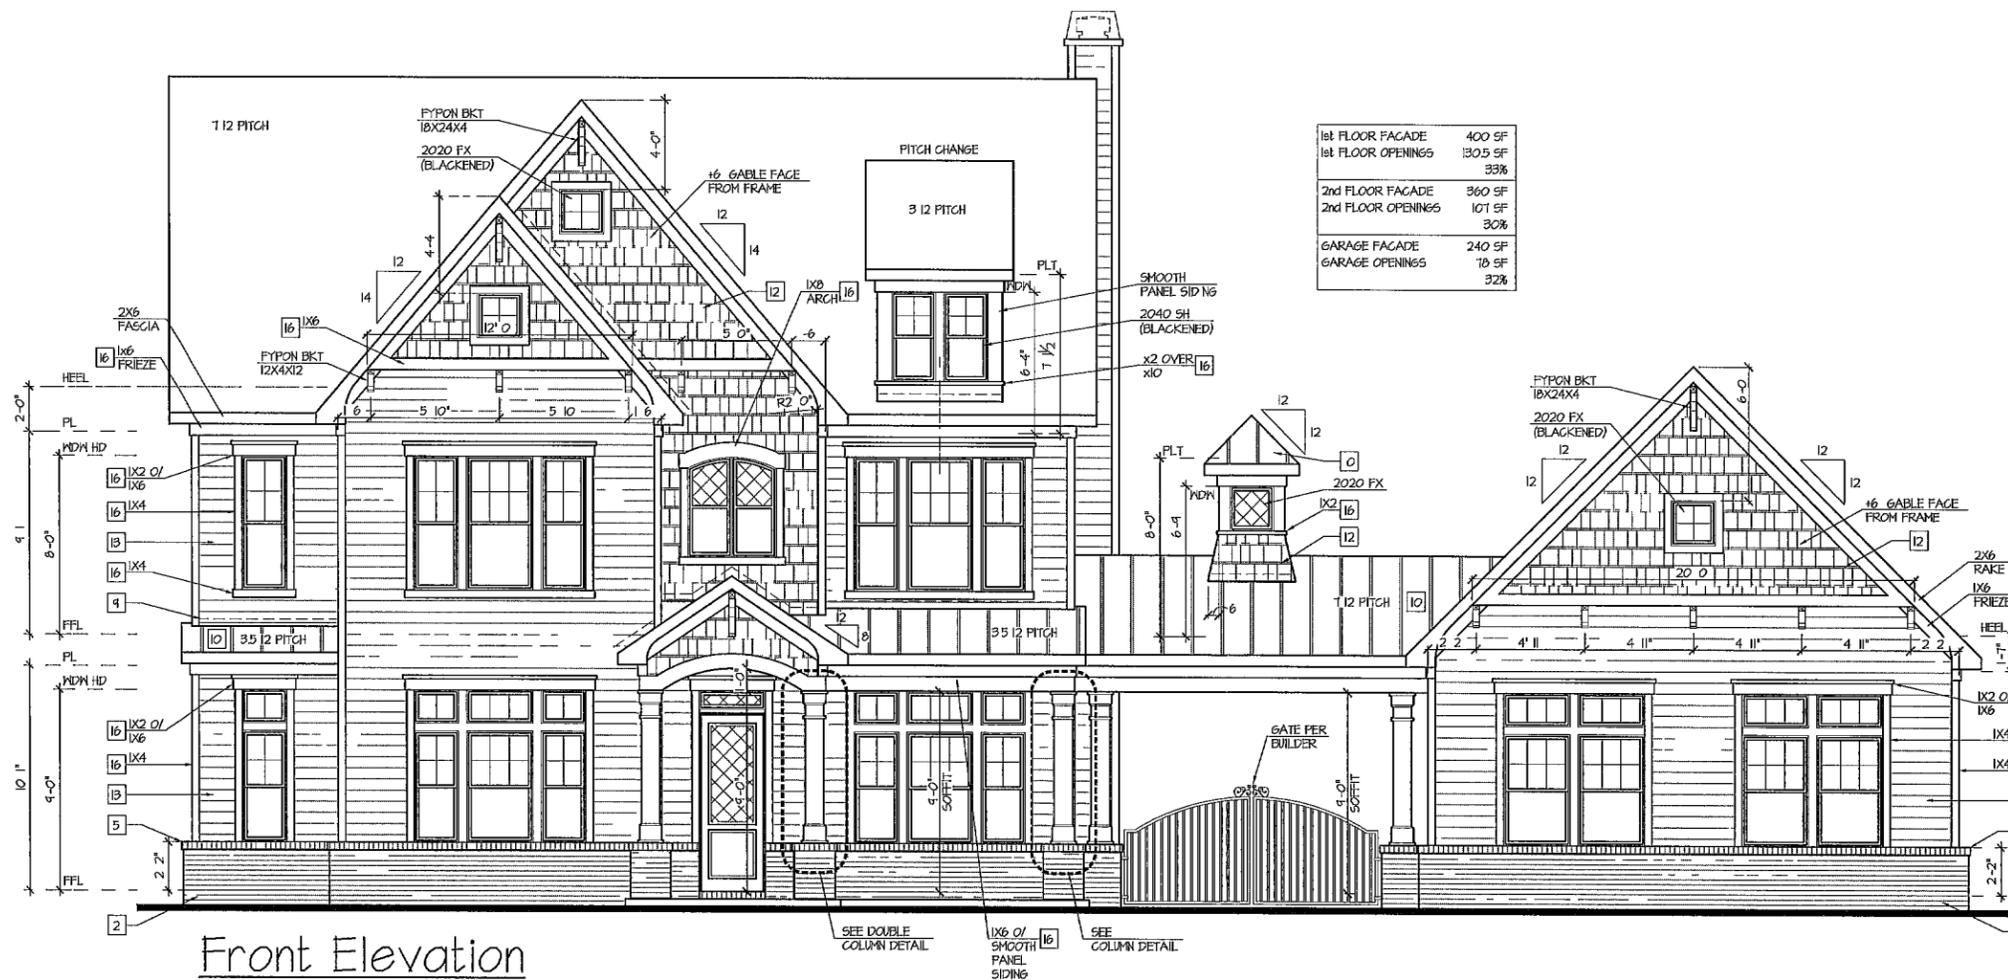

RECEIVED SEP 02 10  
 SCALE: 1/4" = 1'-0" AT 22 X34 LAYOUT 1/8" = 1'-0" AT 11 X17 LAYOUT